

FIG. 1

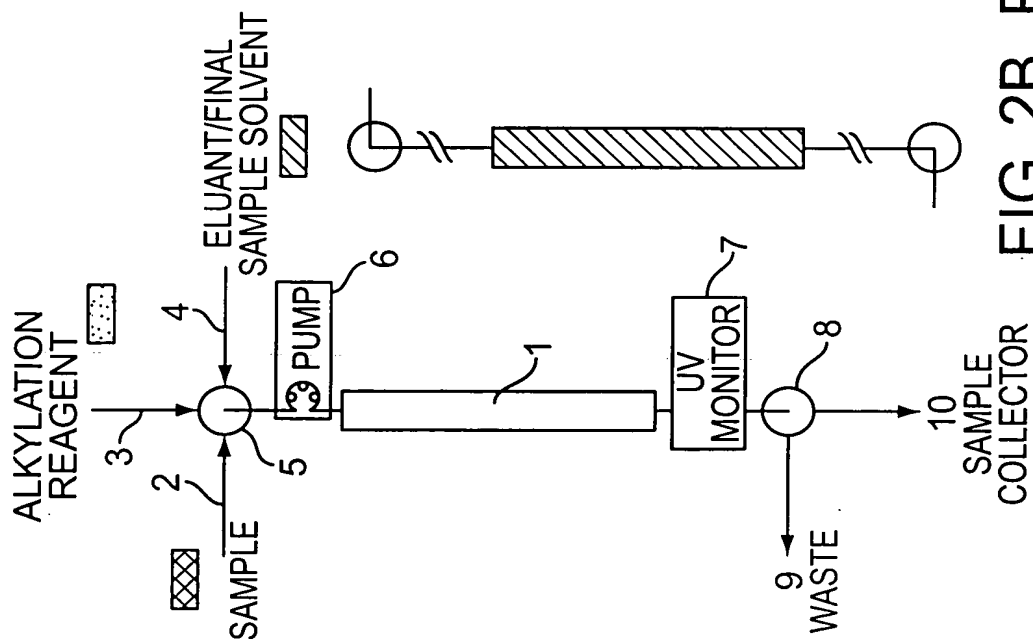


FIG. 2A

FIG. 2D

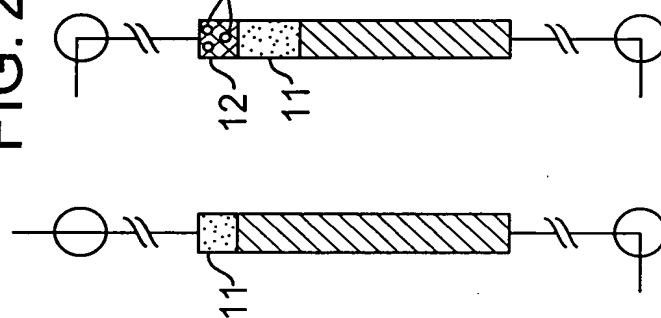


FIG. 2F

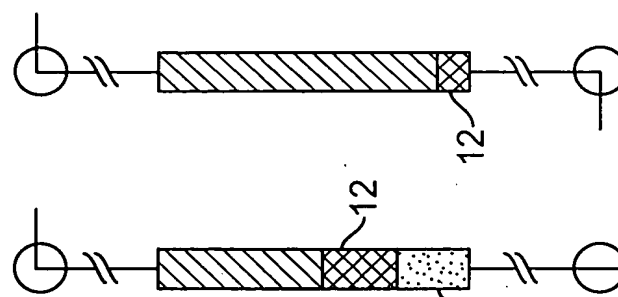
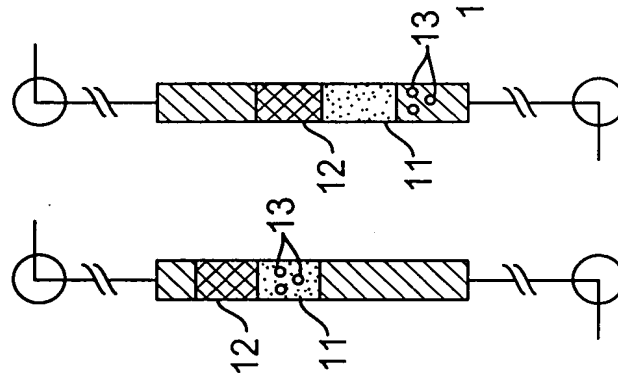


FIG. 2B

FIG. 2E

FIG. 2H

FIG. 2G

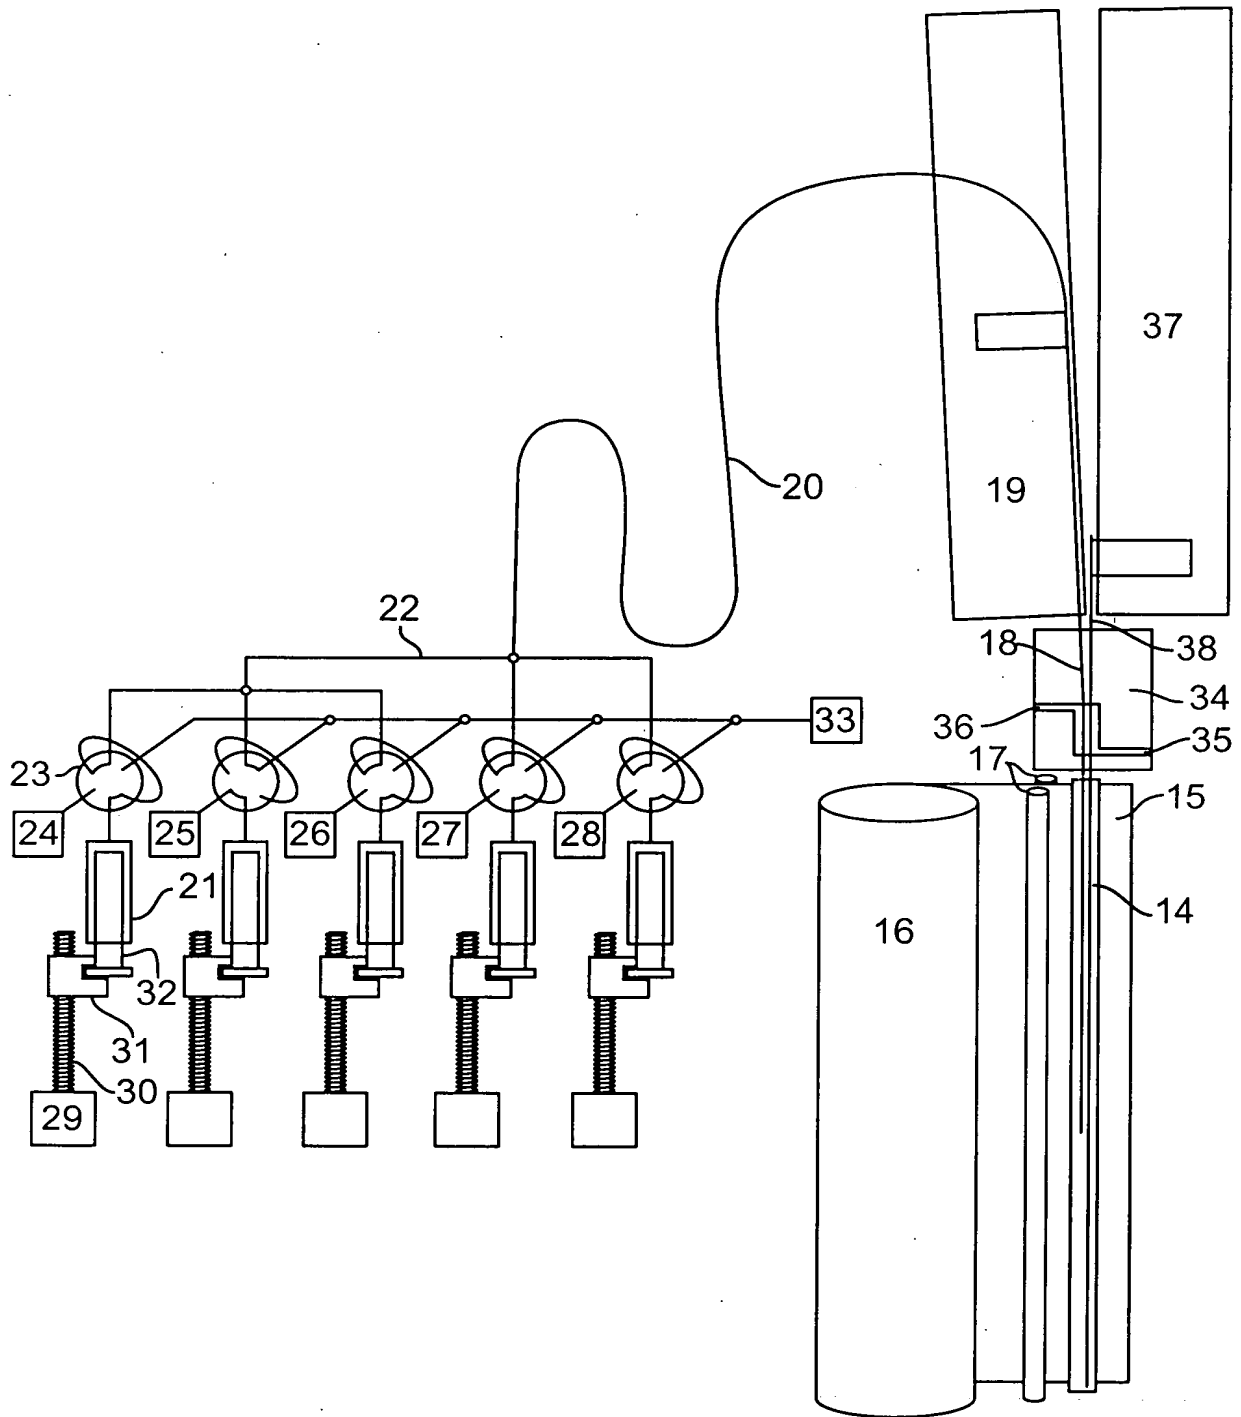


FIG. 3

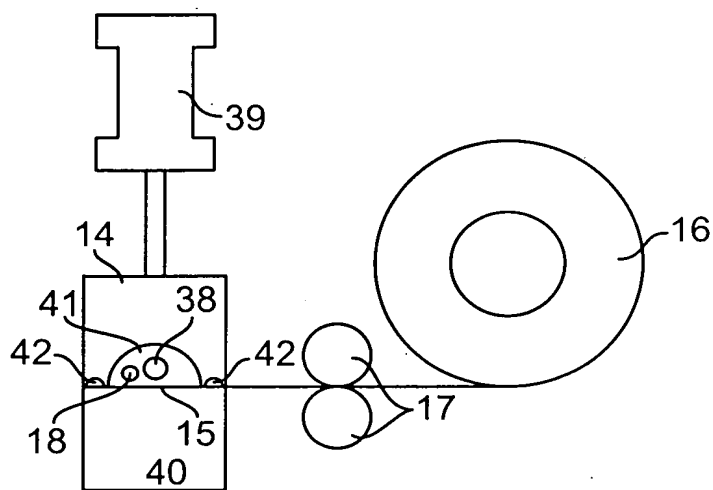


FIG. 4A

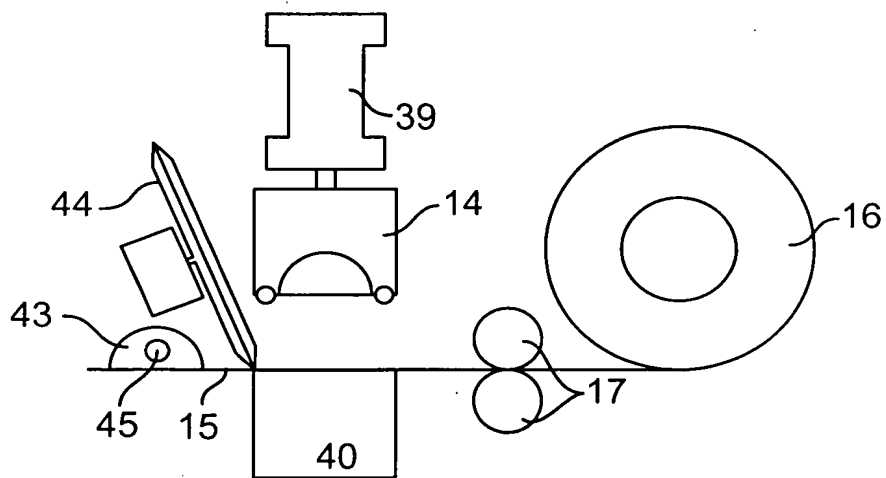


FIG. 4B

0951245-050901

FIG. 5A



FIG. 5A

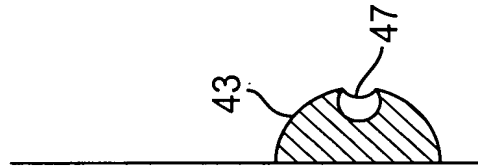


FIG. 5B

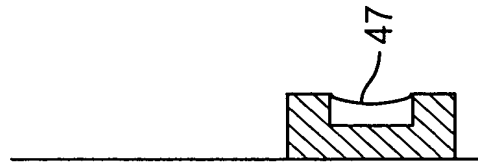


FIG. 5C

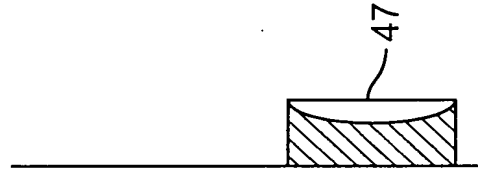


FIG. 5D



FIG. 5E



FIG. 5F

The diagram illustrates a mechanical assembly. A curved member 59 is connected to a base 58. The base includes a threaded rod 56 with a nut 55 and a block 54. A cable 53 is connected to the base and runs along a track 48. The track has a series of teeth 52 and a sliding component 51. Other components labeled include 46, 49, 50, 60, 61, 62, and 63.

Fig. 6

FIG. 7

FIG. 8A

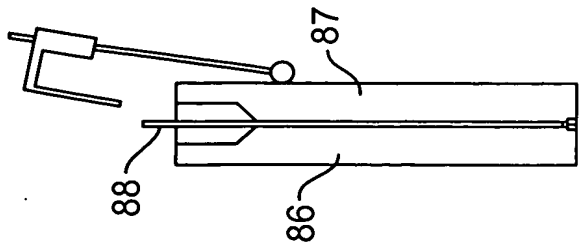


FIG. 8A

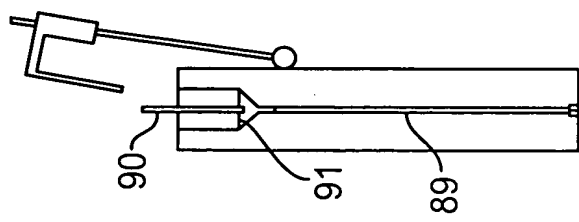


FIG. 8B

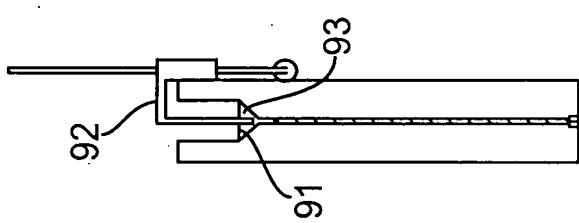


FIG. 8C

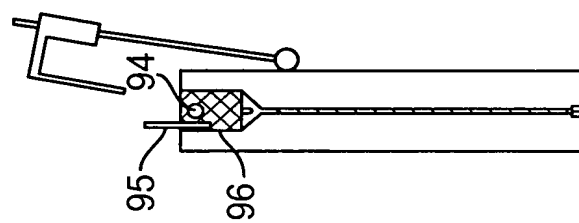


FIG. 8D

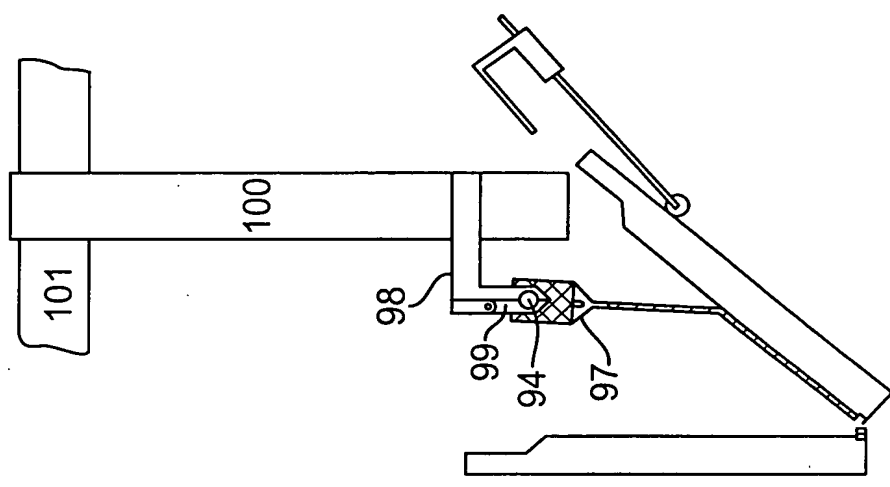
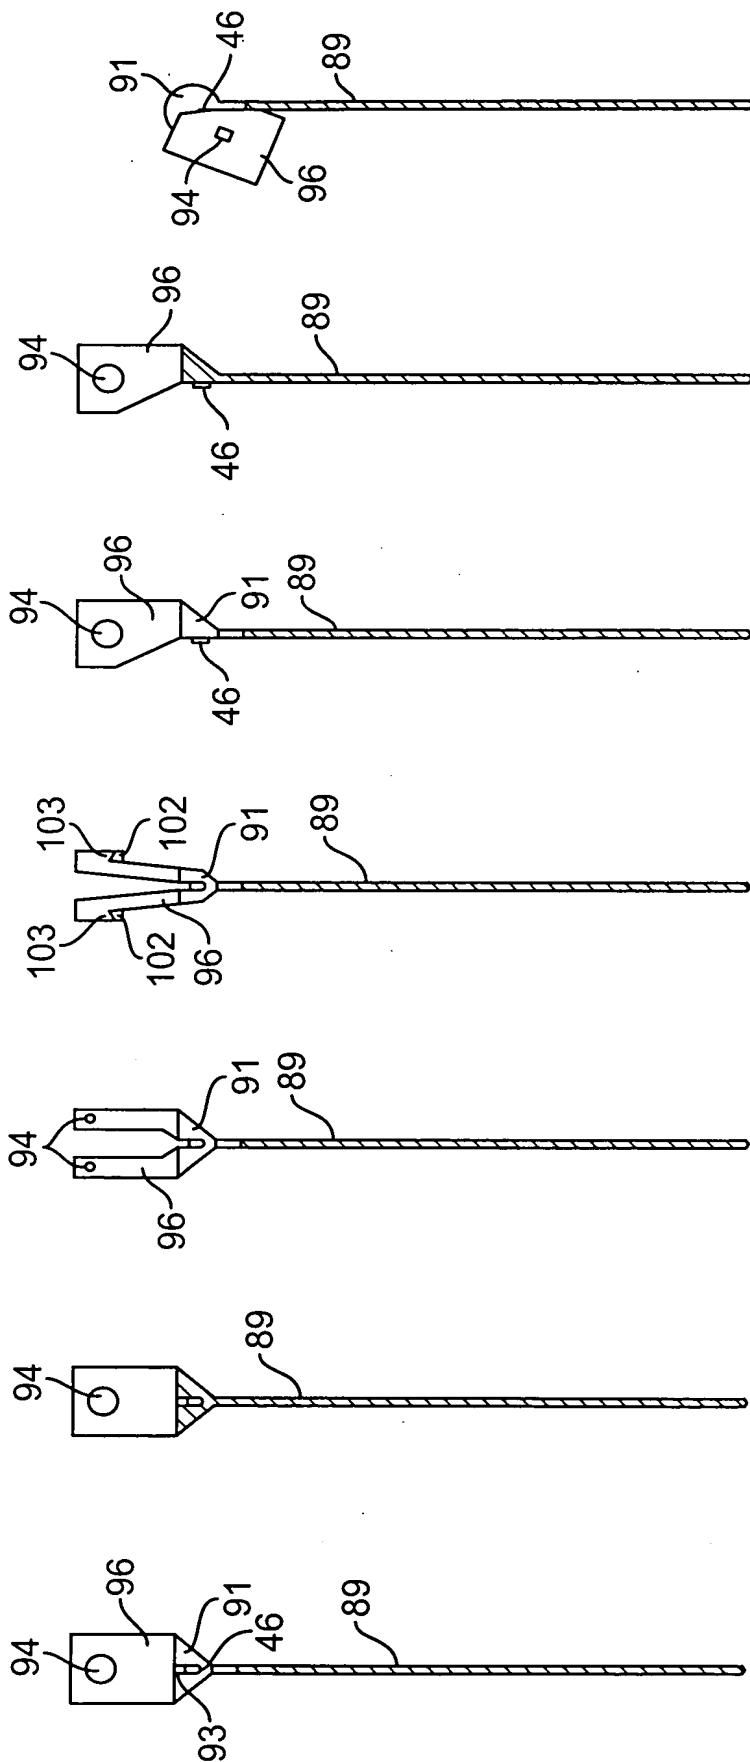


FIG. 8E





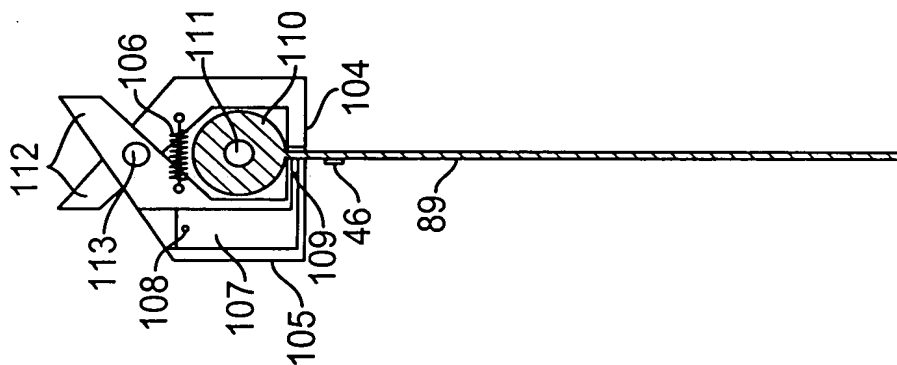


FIG. 9H

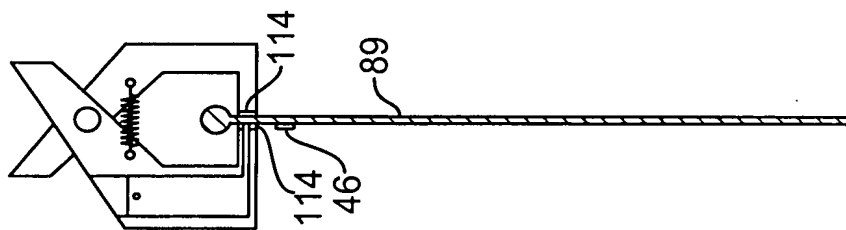


FIG. 9I

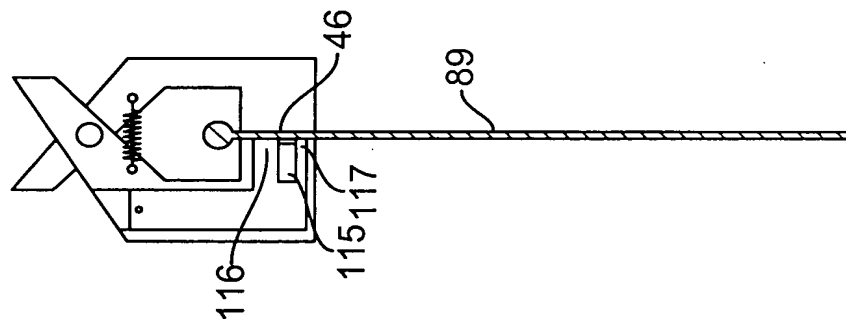


FIG. 9J

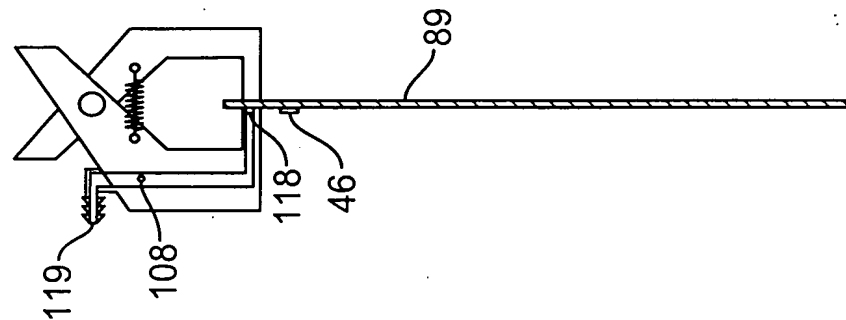


FIG. 9K

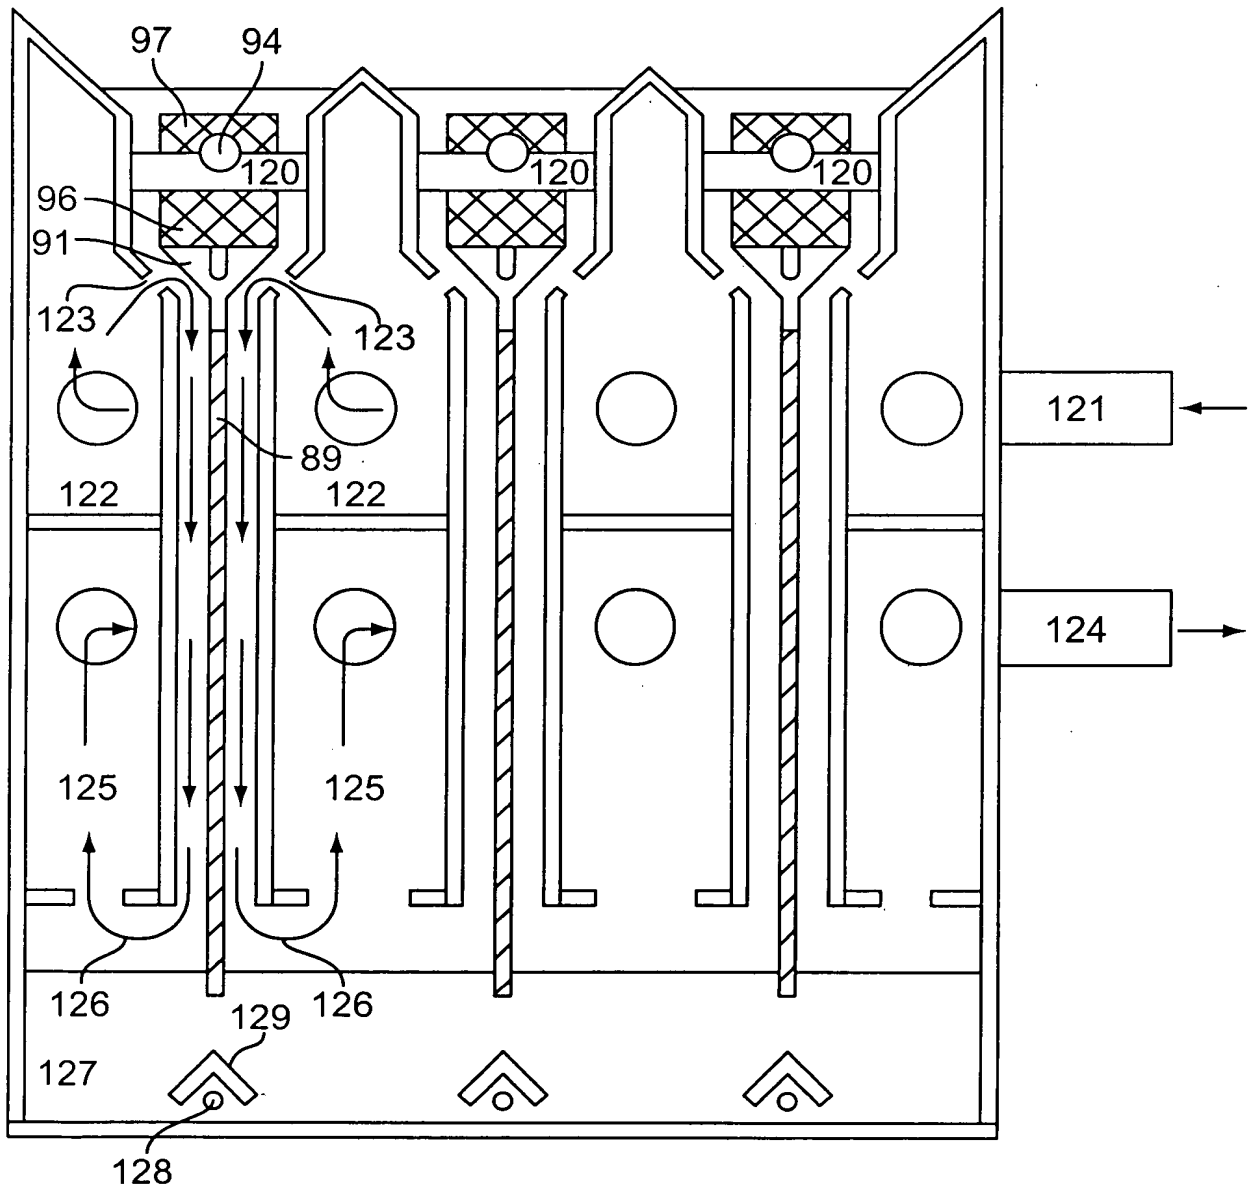


FIG. 10

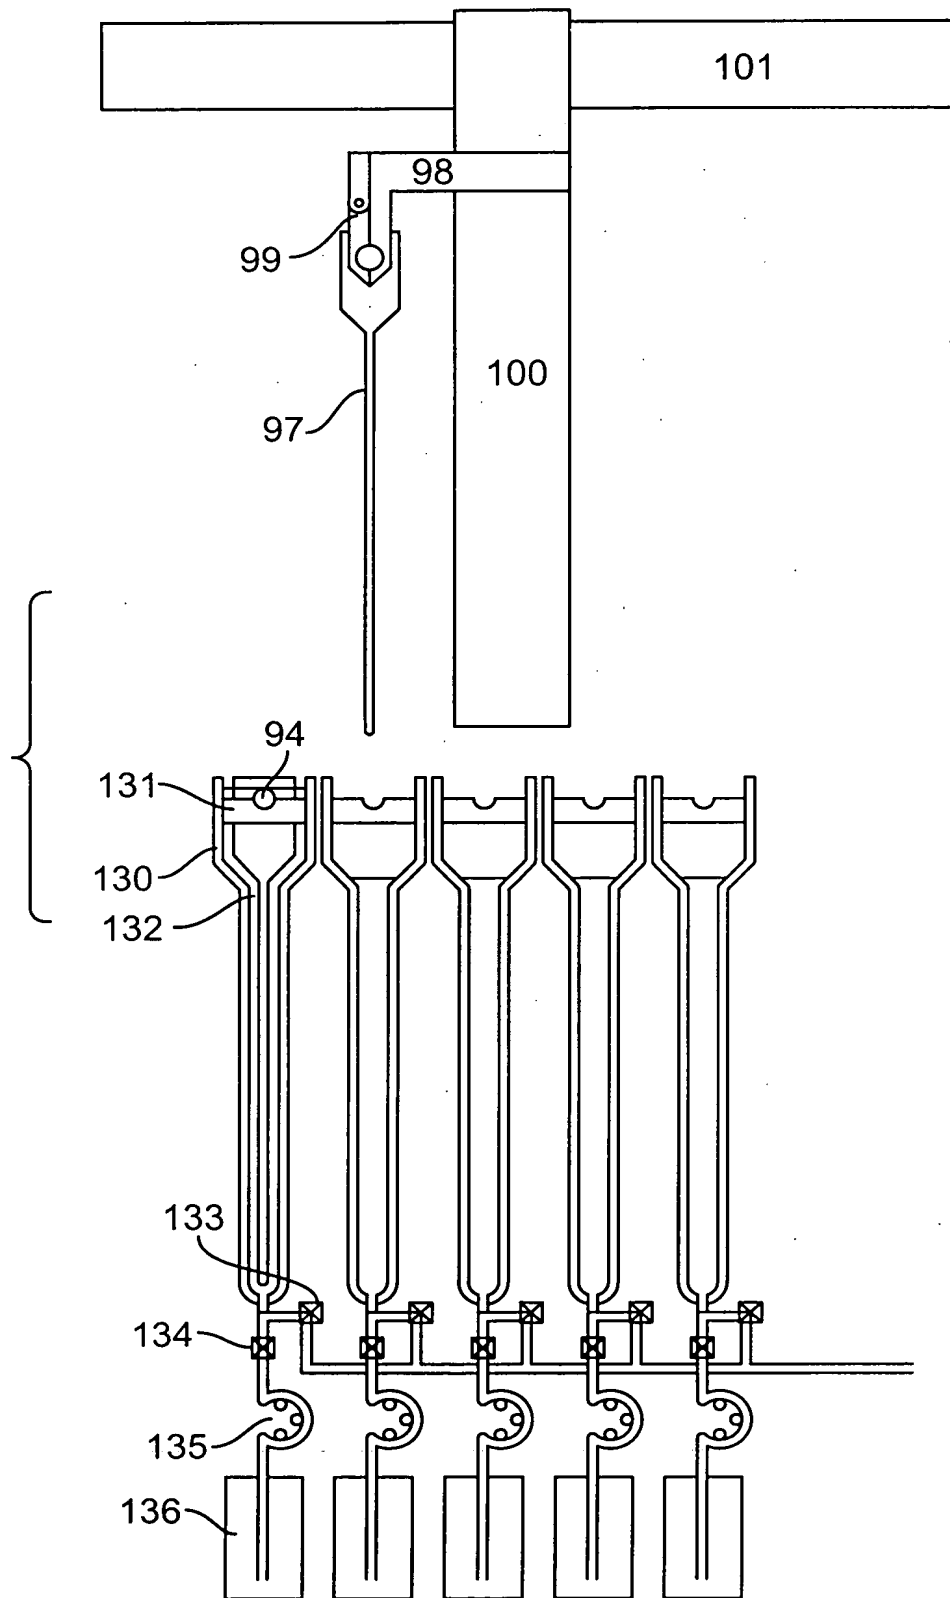


FIG. 11A

09851245-050901

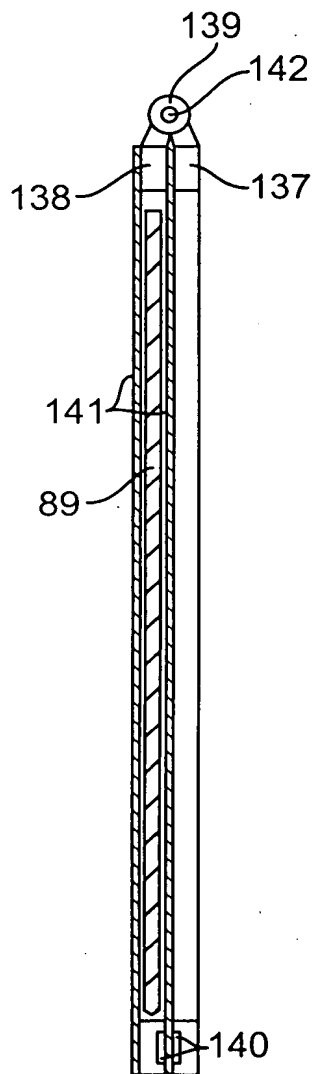


FIG. 11B

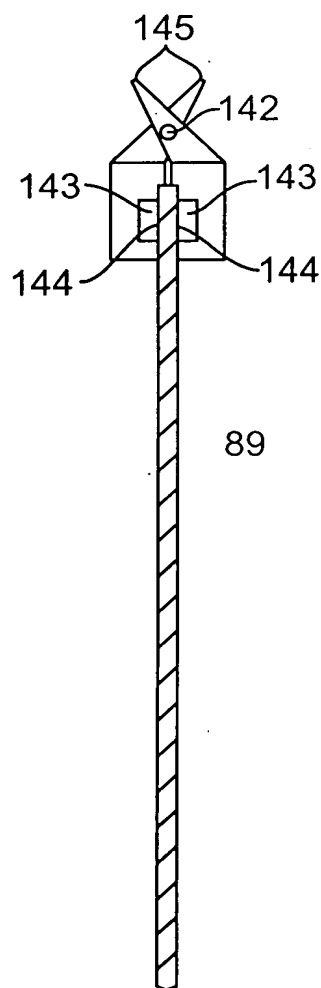


FIG. 11C

FIG. 11B

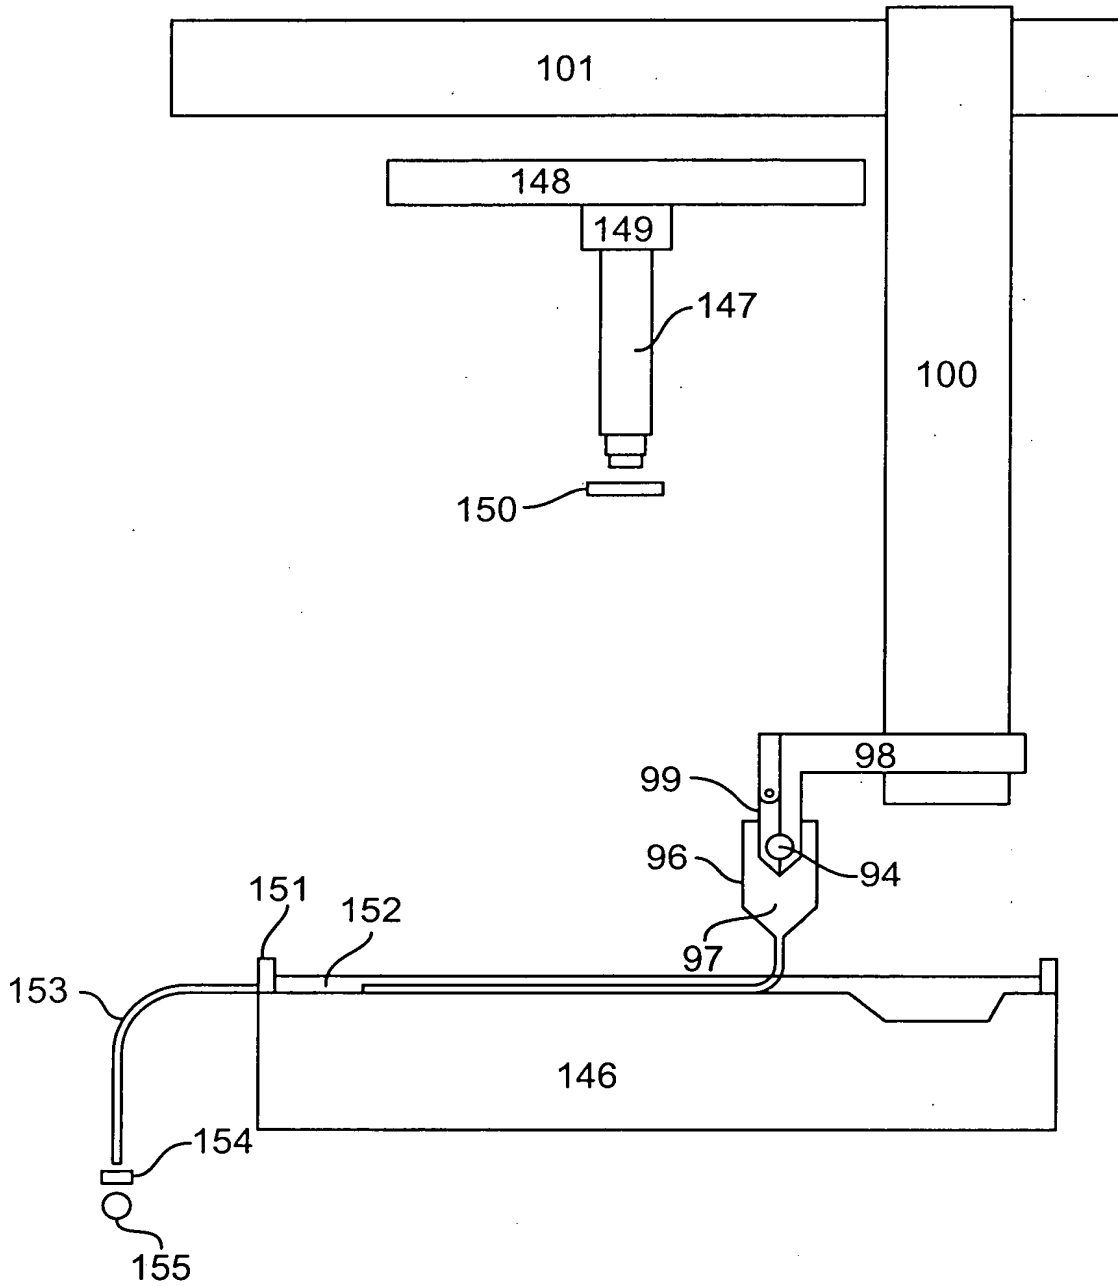


FIG. 12

FIG. 13A

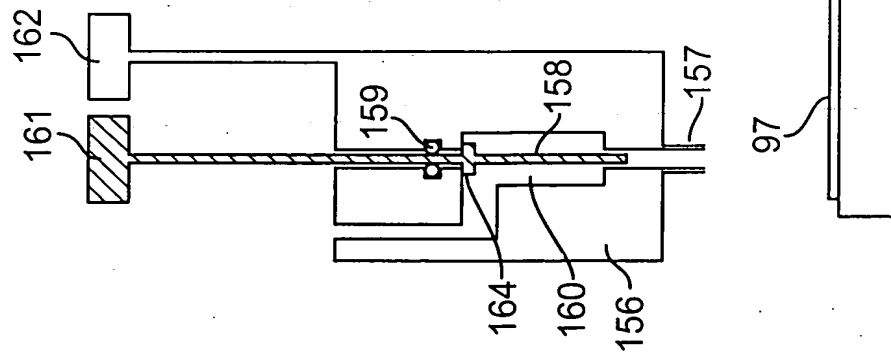


FIG. 13B

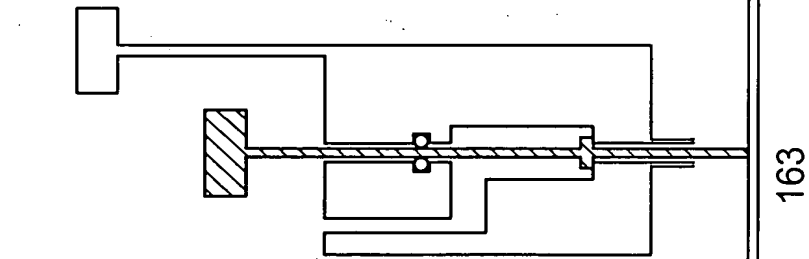


FIG. 13C

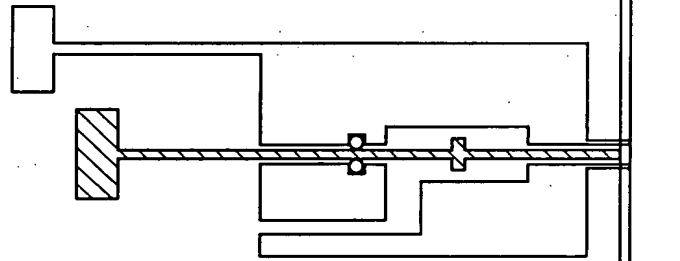


FIG. 13D

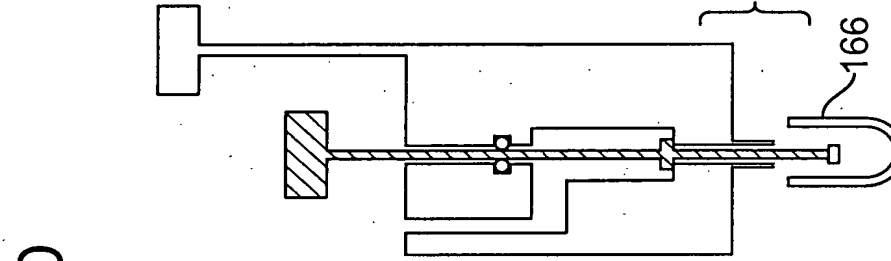
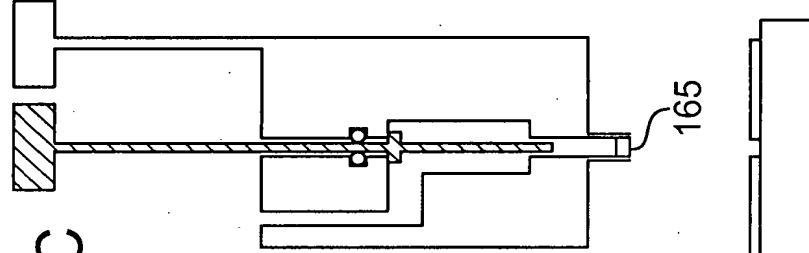


FIG. 13E

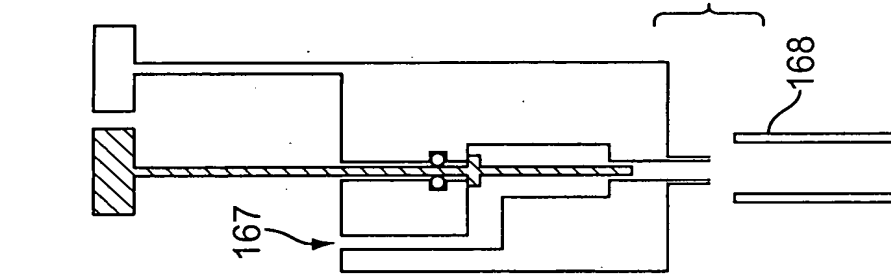


FIG. 13F